


Introduction

The Wireless Headset Adapter --- EHS30, is perfect for connecting Htek UC804, UC804T, UC804G, UC806, UC806T, UC806G, UC840, UC860, UC842, UC862, UC903, UC913, UC923, UC924, UC926 IP Phones and Wireless Headsets.


Such as:

- 1) Plantronics® Wireless Headsets: Plantronics CS510/520/540. (Headset bases C052 and C054);
- 2) Jabra® Headsets: 9400BS (9460), WHB005BS(U) (925);
- 3) Sennheiser Modules: SC230/260/660, DW Pro2, D10, SD Pro2.

Packing Contents

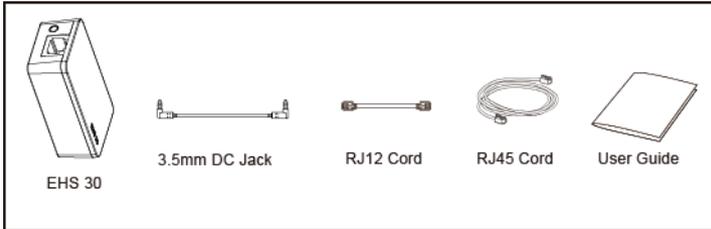

Port Description

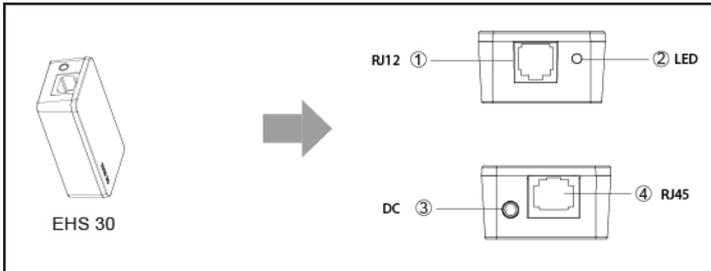

Port ①: RJ-12 Port for IP Phone EXT/EHS or Expansion Module using the RJ12 cord.


Port ②: Operation LED

Port ③: 3.5mm DC Power Jack (for Plantronics Headsets)

Port ④: RJ-45 Jack (for Jabra Headsets)

Installation for Plantronics Headsets

The following figure shows the connection between the IP Phone and the Plantronics wireless headset.

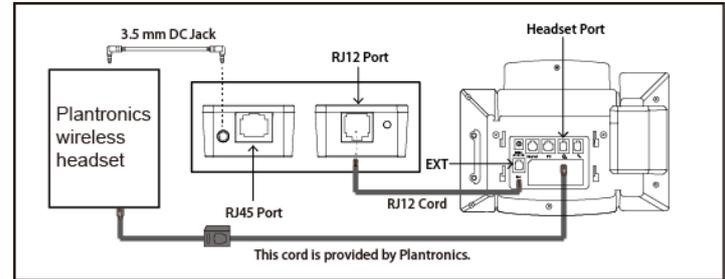


Steps:

- 1) Connect the Wireless Headset to the RJ-9 Headset port on the IP Phone, using the cord provided by Plantronics.
- 2) Connect the included RJ-12 cord between the EHS-30 Adapter RJ12 Port (Port 1) and the EXT/EHS port of the HTEK IP Phone (or to the Expansion Module EXT port, if the expansion module is connected).
- 3) Connect the 3.5mm DC Power Port (Port 3) of the EHS-30 Adapter to the Plantronics Wireless headset using the included 3.5mm DC power cord.

Note: For Plantronics Headsets, the RJ45 jack of the EHS-30 Adapter is not used.

Installation for Jabra Headsets

The following figure shows the connections between the EHS-30 Adapter, the bottom of the HTEK IP Phone, and the Jabra wireless headset base unit.

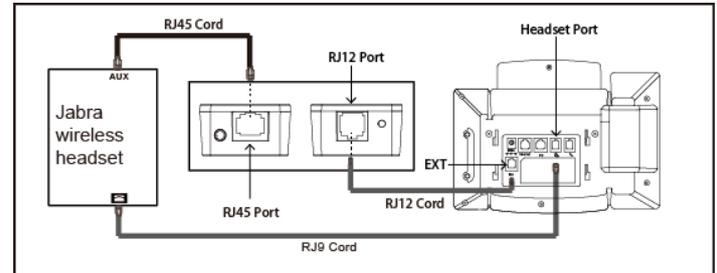

Steps:

- 1) Connect Aux Port of the Jabra Wireless Headset to the RJ45 port (Port 4) of the EHS-30 Adapter.
- 2) Connect the included RJ-12 cord between the EHS-30 Adapter RJ12 Port (Port 1) and the EXT/EHS port of the Htek IP Phone (or to the Expansion Module EXT port, if the expansion module is connected).
- 3) Connect the RJ-9 cord from the Jabra Wireless Headset to the Headset jack of the Htek IP phone.

Note: For Jabra Headsets, the 3.5mm DC Power jack and cord are not used.

FCC

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Wireless Headset Adapter

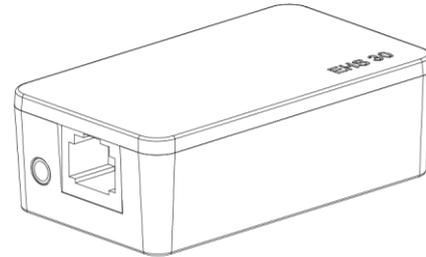

Quick Reference for EHS30

Tel: 0086-25-84658050 | Fax: 0086-25-84658319 | Mail: support@htek.com | Web: www.htek.com

Add: 5th Floor, 1st Building Huashen Tech Park10 Huashen Temple Yuhuatai Dis Nanjing 210012 China

Copyright: © Nanjing Hanlong Technology Co., Ltd. 2005-2018 All rights reserved.